

# D-LINE HD10-A

## TWO-WAY SYSTEM



## DESCRIPTION

The HD 10-A, with an exceptional full range, is the optimum choice for live sound and installed situations.

Thanks to its deep bass punch, clean midrange output and accurate high frequencies, it offers the ultimate intelligibility in vocal and recorded music, from live sound to playback and from monitoring to fixed installation applications. The concept of this unique speaker derives from the touring industry, bringing in a compact cabinet all the experience of RCF professional sound. The new 10" woofer is the result of the latest refinement in year of RCF experience in compact 2 way speakers. Features a 2,5" voice coil, very high efficiency and controlled bass reproduction.

The 1" compression driver uses a new 1.7" voice coil dome design and optimised geometry radial phase plug. This innovative design is powered from a high flux magnet offering a very open and natural midrange sound with extreme precision in high frequency reproduction.

RCF HD 10-A is equipped with a new generation of 600 Watt Digital Amplifier. RCF Class-D power amplifiers technology packs huge performance operating with high efficiency into a lightweight solution. D Line amplifiers deliver ultra fast attack, realistic transient response and impressive audio performance. The amplifier features a solid mechanical aluminium structure which not only stabilize the amplifier during transportation but also assist in the heat dissipation. All the D-LINE amplifiers presents SMPS power supply section in order to produce maximum output and minimum transportation weight. The integrated DSP manages crossover, equalisation, soft limiter, compressor and dynamic bass boost. Switchable EQ Mode make it easier to select among two different equalisation presets: Extended response switch, which slightly emphasizes the bass response for playback music and low volume applications and Linear response switch, for using the speaker to amplify a live mix. A useful Mic/Line switch to adjust the input sensitivity is provided. When used just for speech, the Mic setting allows to use a microphone directly with the speaker. Set the selector to Line when using the speaker for live music or playback.

An easy to reach volume knob on the back allows to set the overall volume of the speaker according to its application.

3 status LEDs – Power / Signal / Status are provided for monitoring the system.

D LINE cabinets are moulded on a special polypropylene composite material designed to dampen down vibrations even at maximum volume settings. From moulding to the final texture, D LINE offers the maximum reliability and strength for the intensive use on the road. The reflex porting has been resized to offer a better efficiency. The HD 10-A is equipped with a top handle and a side handle with rubber handgrip for greater portability. The new cabinet shape will allow every D-LINE model to be used in the standard configuration as well as in stage monitor model. Two M10 and 3 M6 threaded inserts are provided for optional mounting hardware in Installed Sound Applications.

## MAIN APPLICATIONS







- Live Sound
- Rental
- Portable PA
- Stage Monitoring
- Clubs

## MAIN FEATURES

- 1200 WATT PEAK, 600 WATT RMS
- Digital Bi-amp
- DSP Sound Processing
- RCF Precision Transducers
- SPL max. 129 dB




# D-LINE HD10-A

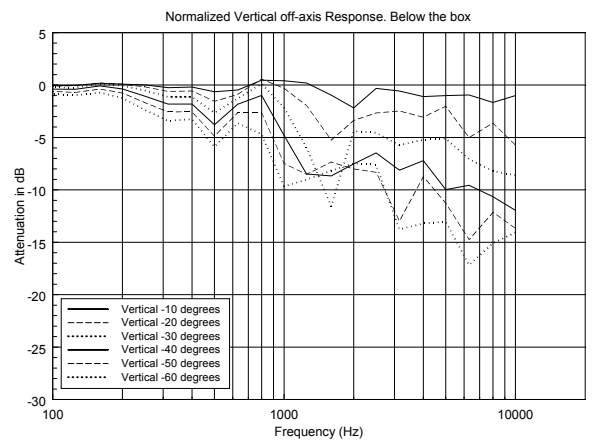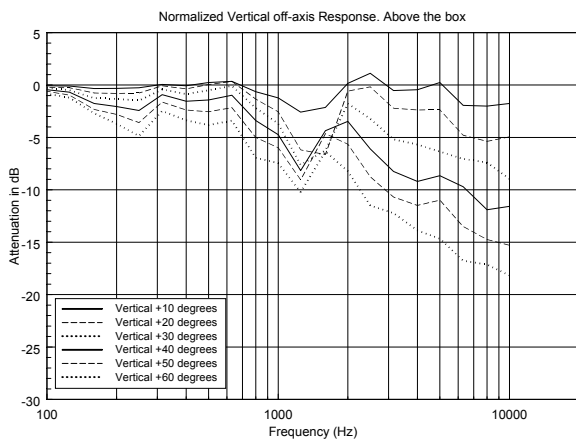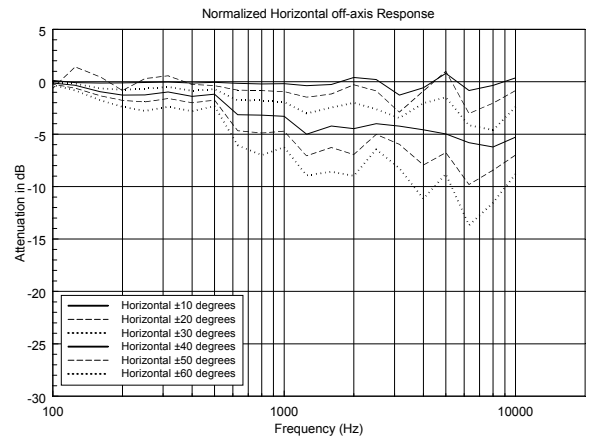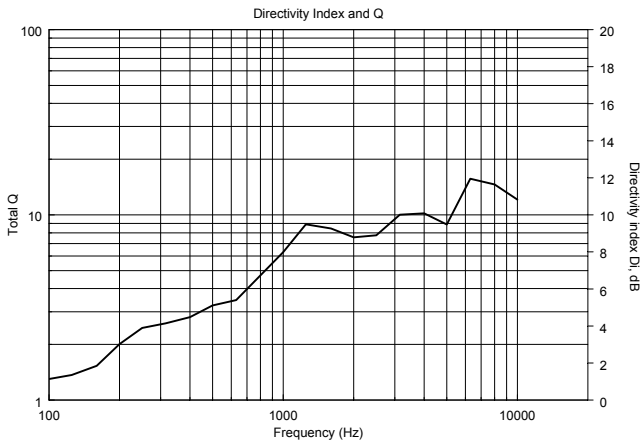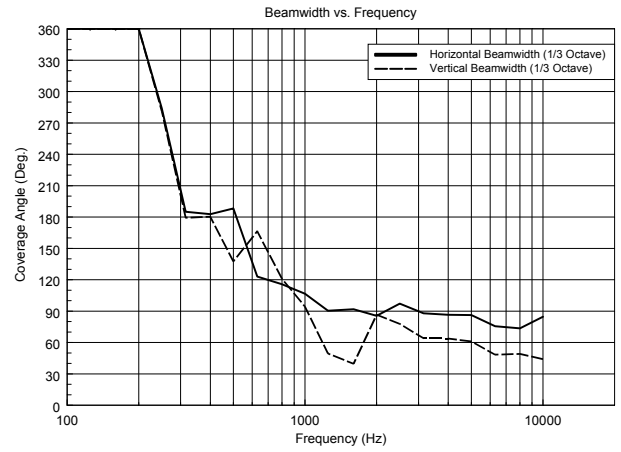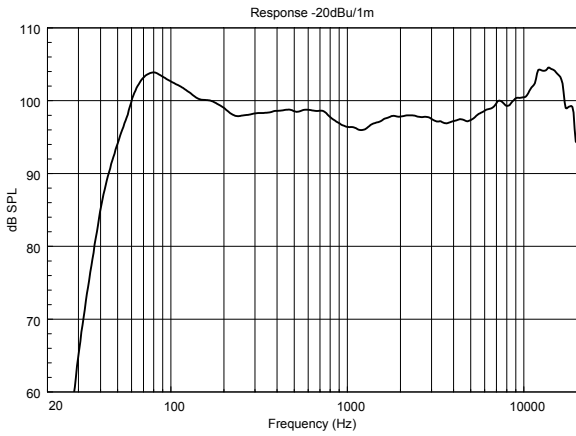


# D-LINE HD10-A


## HORIZONTAL 1/3 POLAR PLOT

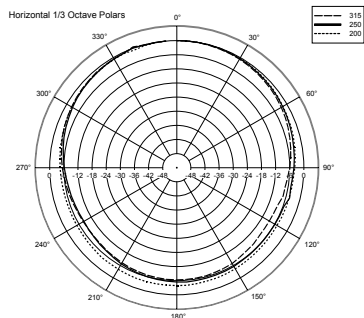


HD10-A

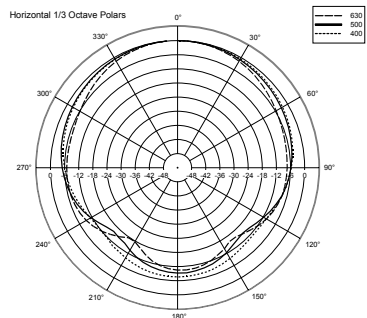


HD10-A

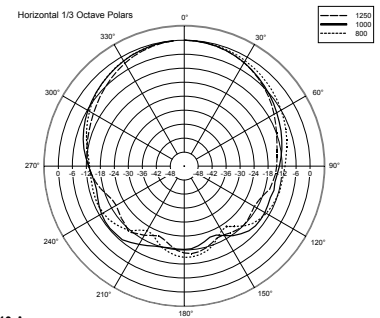


HD10-A

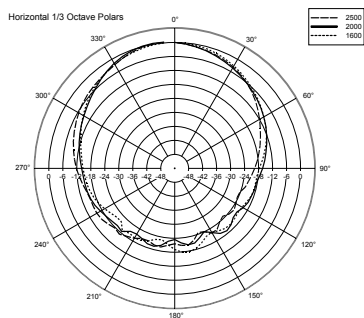

HD10-A

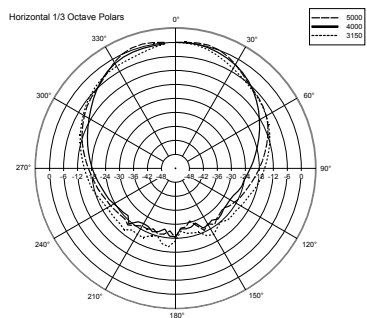


HD10-A

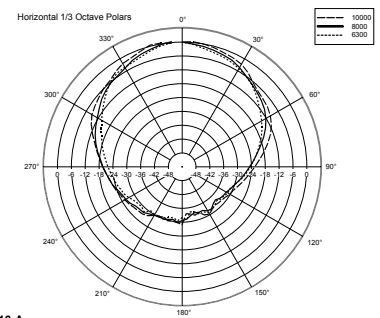


HD10-A


## VERTICAL 1/3 POLAR PLOT

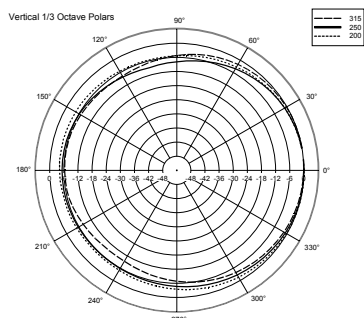


HD10-A

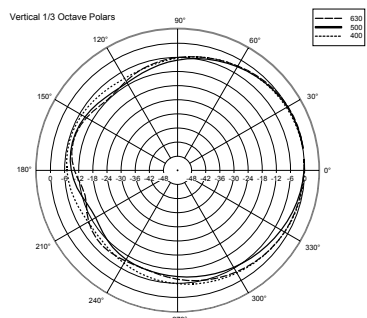


HD10-A

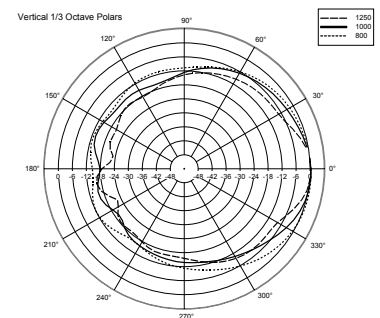


HD10-A

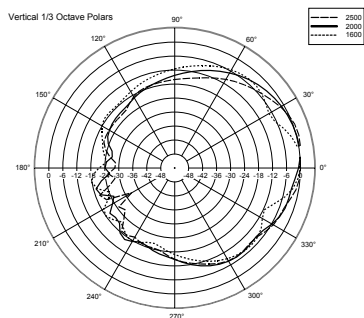

HD10-A

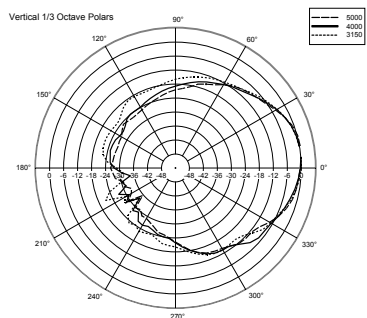

HD10-A

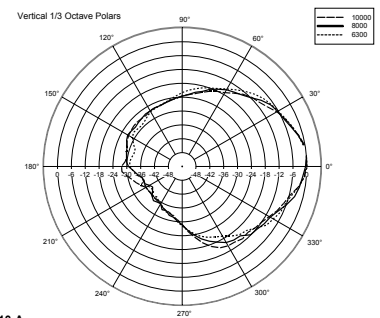

HD10-A




# D-LINE HD10-A

## PART NUMBERS

13040003 - 230VOLT

13040004 - 115 VOLT

## DIMENSIONS (All data are in mm)

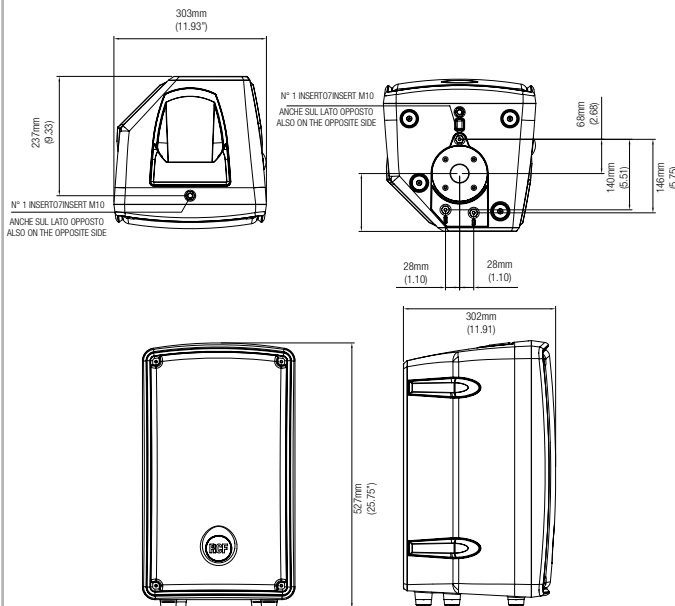

## ACOUSTICAL SPECIFICATIONS

Frequency response:	50 Hz- 20 KHz
Max SPL:	129 dB
Horizontal coverage angle:	90°
Vertical coverage angle:	60°
Compression driver:	1.0", 1.7" voice coil
Midrange:	-
Woofer:	10", 2.5" voice coil

## INPUT SECTION

Input signal (Impedance):	bal/unbal
Input/Output connector:	Jack-XLR male
Input sensitivity:	-2 dBu / + 4 dBu

## PROCESSOR SECTION

Crossover frequencies:	1700 Hz
Protections:	Themel, RMS
Sensitivity control:	yes
Limiters:	fast limiter
High pass:	-
Controls:	Volume, EQ shape, Mic/line

## ACCESSORIES

AC S260	Steel speaker floor stand with folding base and telescopic rod, tube diameter 35mm. Load capacity up to 60kg, Weight 7.8 Kg, H MIN/MAX 170cm/240cm. Length once folded 123cm
AC S140	Aluminium speaker floor stand with folding base and telescopic rod, tube diameter 35mm. Load capacity up to 40kg, Weight 2.7 Kg, H MIN/MAX 140cm/214cm. Length once folded 107cm
AC PRO-FS	Steel speaker floor stand with folding base and telescopic rod, tube diameter 35mm. Load capacity up to 50kg, Weight 4.5 Kg, H MIN/MAX 137cm/210cm. Length once folded 102cm
AC PRO-LF	Steel professional adapter sleeve for speaker floor stand, tube diameter 35 mm. Load capacity up to 50Kg, Weight 0.7 Kg, H 27.5 cm
AC PRO-PM	Steel pole mount accessory for a satellite speaker on a subwoofer, tube diameter 35 mm. Load capacity up to 35Kg, Weight 2.4 Kg, H MIN/MAX 95cm/137cm
AC EB4X	Kit including No. 4 shouldered 10mm eye bolts
AC PMA	Speaker pole mount
AC HD-FD 10 H-BR	Horizontal bracket for HD10-A and FD 10-A speakers
Cover HD-FD 10	Cover for HD10-A and FD 10-A speakers

## AMPLIFIER

Power supply:	switching 600 Watt
High frequencies:	D / 150 Watt
Mid frequencies:	-
Low frequencies:	D / 450 Watt
Cooling:	convection
Connection:	Xlr/jack input, xlr signal output

## PHYSICAL

Height:	527 mm (20.74")
Width:	303 mm (11.92")
Depth:	303 mm (11.92")
Weight:	13.9 kg (30.64 lbs)
Cabinet:	Composite PP
Hardware:	pole mount
Handles:	1 top, 1 side
Pole mount cap	yes
Colour:	Black